


GUARDIAN™

MODEL SD6RC REMOTE CONTROL WITH 10 YEAR LITHIUM BATTERY

Thank you for purchasing this Guardian Remote Control. Please take a few minutes to read this user manual carefully to familiarise yourself with its operation and save it for future reference. This product is compatible with the Guardian SD6 and SD6B smoke alarms.

SPECIFICATIONS

Battery Included: DC3V type CR2450
Standby Current: $\leq 3\mu\text{A}$
Operating Current: $\leq 30\text{mA}$
Wireless Frequency: 433.42 MHz
Wireless Distance: 5 meters to first alarm
Humidity Range: $\leq 95\%$ relative humidity (RH)
Temperature Range: 0-45°C
Low Battery Warning: 2.5V \pm 0.1V
Battery Lifetime: 10 years
Interconnectable: Up to 40 smoke alarms
Complies with: AS/NZS 4268:2017

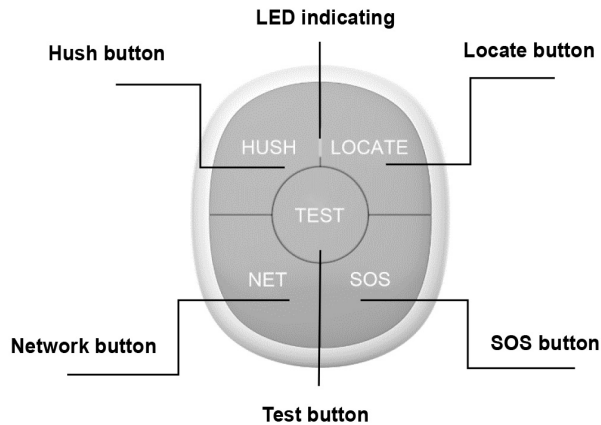

FUNCTIONS

NETWORK Button: If you are using the control as a Master, press the button once. The LED indicator will flash and enter standby status, connect the SD6 or SD6B as per the instructions provided with the smoke alarm. To exit the network mode press and release the button within 2 seconds. The LED indicator will illuminate for 30 seconds, if the network connection is successful the LED indicator will flash then the LED indicator will return to on after 30 seconds.

TEST Button: Press the button once, the LED indicator will flash for 8 seconds. The smoke alarm will receive the RF test signal and will enter into a remote test status (the smoke alarm will beep for 10 seconds and the LED indicator will flash for 5 minutes). Note: It is recommended that the smoke alarm should be tested monthly.

LOCATE Button: This button allows you to identify which smoke alarms activate first. When the smoke alarms activate, press the LOCATE button. All the connected smoke alarms will then enter normal status, except for the smoke alarms that activated first. This allows you to investigate why the smoke alarm activated without any smoke present.

HUSH Button: When the smoke alarms activate, press the HUSH button once. The LED indicator will flash for 10 seconds, the smoke alarm will then enter into a 10 minute alarm mute status. If there is no smoke present the alarm will revert back to its normal status after the 10 minutes.

SOS button: Press the button once, the LED indicator will flash for 1 minute. The smoke alarm will enter remote alarm status and will activate for 1 minute. Press the button once again to cancel this state immediately. Note: Press the LOCATE button quickly to exit the remote alarm status. The LED indicator will then stop flashing.

FUNCTION	BUTTON	RED LED	OTHER	TROUBLESHOOTING
Standby	/	/		If the remote control is not working, please ensure the battery safety tab has been removed from the back of the unit.
TEST	Quick press	Flashes for 8 secs		
Network (Master)	Quick press	On 30 secs	Quick press to exit	
Network (Slave)	Quick press	Flashes intermittently		
LOCATE	Quick press	On 100ms		
HUSH	Quick press	Flashes for 10 secs		
SOS	Quick press	Flashes for 60 secs	Quick press to exit	
Low Battery		Flashes once every 10 secs		

LIMITED WARRANTY

This manufacturer's warranty is provided by Repelec (Aust) (ACN 003 762 641).

The Guardian smoke alarm is guaranteed for a period of 5 (five) years from date of purchase, provided the product has been installed correctly and in accordance with the instructions provided. This guarantee shall become invalid if this product has been incorrectly installed, misused, tampered with or accidentally damaged.

- If the goods are defective, we undertake to repair or replace the goods or any part of them that is defective; or wholly or partly recompense you if they are defective.
- Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and failure does not amount to a major failure.
- If you wish to make a warranty claim, please return this product to the original place of purchase together with your purchase receipt, or contact Repelec (Aust) - details below.

REPELEC (AUST) AND ITS SUPPLIERS SHALL HAVE NO LIABILITY FOR ANY PERSONAL INJURY, PROPERTY DAMAGE, OR ANY SPECIAL INCIDENTAL CONTINGENT OR CONSEQUENTIAL DAMAGE OF ANY KIND RESULTING FROM A FIRE. THE EXCLUSIVE REMEDY FOR BREACH OF THE LIMITED WARRANTY CONTAINED HEREIN IS THE REPAIR OR REPLACEMENT OF THE DEFECTIVE PRODUCT AT THE DISTRIBUTORS OPTION. IN NO CASE SHALL REPELEC (AUST) AND ITS SUPPLIERS BEAR ANY LIABILITY UNDER ANY OTHER REMEDY PRESCRIBED BY LAW EXCEEDING THE PURCHASE PRICE. YOUR SMOKE ALARM IS NOT A SUBSTITUTE FOR PROPERTY, DISABILITY, LIFE OR OTHER INSURANCE OF ANY KIND. APPROPRIATE INSURANCE COVERAGE IS YOUR RESPONSIBILITY. PLEASE CONSULT YOUR INSURANCE AGENT.

This warranty does not affect a consumer's statutory rights in any way.

NATIONAL DISTRIBUTOR



For further information contact:

REPELEC (AUST)

☎ 1300 555 586 🌐 repelec.com.au ✉ sales@repelec.com.au